

Article Info

Received: 01 Jan 2016 | Revised Submission: 20 Feb 2016 | Accepted: 01 May 2016 | Available Online: 01 Jun 2016

Optimization of Process Parameters of CNC Milling

Malay*, Kishan Gupta**, JaideepGangwar***, Hasrat Nawaz Khan****, Nitya Prakash Sharma*****,
Adhirath Mandal*****, Sudhir Kumar***** and RohitGarg*****

ABSTRACT

CNC Vertical Milling Machining is a widely accepted material removal process used to manufacture components with complicated shapes and profiles. During the face milling process, the material is removed by the 10 mm Dia tool. The effects of various parameters of milling process like spindle speed, depth of cut, feed rate have been investigated to reveal their Impact on surface finish using Taguchi Methodology. Experimental plan is performed by a Standard Orthogonal Array. The results of analysis of variance (ANOVA) indicate that the feed Rate is most influencing factor for modeling surface finish. The graph of S-N Ratio indicates the optimal setting of the machining parameter which gives the optimum value of surface finish. The optimal set of process parameters has also been predicted to maximize the surface finish.

Keywords: Taguchi Method; Surface Roughness; CNC Machine.

1.0 Introduction

In present time the technology of CNC vertical milling machine has been improved significantly to meet the advance requirements in various manufacturing fields, especially in the precision metal cutting industry. This experiment gives the effect of different machining parameters (spindle speed, feed, and depth of cut) on surface finish in face milling. The demand for high quality and fully automated production focus attention on the surface condition of the product, surface finish of the machined surface is most important due to its effect on product appearance, function, and reliability. For these reasons it is important to maintain consistent tolerances and surface finish. Among several CNC industrial machining processes, milling is a fundamental machining operation. Face milling is the most common metal removal operation encountered. It is widely used in a variety of manufacturing in industries. During Face milling, the depth of cut is

small. Technological parameter range plays a very important role on surface roughness. In Face milling, use of high cutting speed, low feed rate and low depth of cut are recommended to obtained better surface finish for the specific test range in a specified material. This experimental investigation outlines the Taguchi optimization methodology. The experiment is conducted on aluminium alloy (Al 6351) the processing of the job is done by High Speed Steel (HSS) tool under finishing conditions. The machining parameters evaluated are spindle speed, feed rate and depth of cut. The experiments are conducted by using Taguchi L9 orthogonal array as suggested by Taguchi. Signal to Noise (S/N) ratio and Analysis of Variance (ANOVA) is employed to analyze the effect of milling parameters on surface roughness.

2.0 Literature Review

V.S. Suresh and P. Venkateswara Rao [1]
(2002) Adopted a two stage approach towards

*Corresponding Author: Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India
(E-mail: adhirath.mandal@gmail.com)

**Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India

***Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India

****Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India

*****Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India

*****Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India

*****Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India

*****Department of Mechanical Engineering, Greater Noida Institute of Technology, UP, India

optimization of surface roughness. First, experimental results were used to build mathematical models for surface roughness by RSM. Then, the second order mathematical model was taken as an objective function and was optimized using genetic algorithm (GA) to obtain the machining conditions for a desired surface finish.

R. Noorani and Y. Farooque[2] (2008) The objective of this research was to study the effects of CNC machining processes on Aluminum alloy 6061 samples for its surface roughness. The main conclusion of this reason is that two factors highly responsible for the surface roughness are feed rate and tool size.

T. K. Barman et al.[3] (2009) have conducted experiments based on Taguchi L27 orthogonal array to investigate the effect of process parameters such as Cutting speed, Feed and Depth of cut on surface roughness in CNC milling. They selected AISI 1040 steels as work material. An optimum cutting parameter combination was found out for maximum fractal dimension and it may be useful in computer aided process planning.

S. Moshat and SauravDatta[4] (2010) In this experiment use of PCA based hybrid Taguchi method has been proposed and adopted for solution of multi-objective optimization, along with a case study, in CNC end milling operation. From the study and analyses, we conclude that this proposed method has been found efficient for solving multi-attribute decision making problem i.e., for multi-objective product as well as process optimization; for continuous quality improvement.

SurasitRawangwong et al.[5] (2012) had tried to investigate the effect of process parameters on the surface roughness in Al 7075-T6 face milling. The optimal setting for the selected process parameters was speed at 2930 rpm and the feed rates at 808 mm/min. They also had given mathematical model for surface roughness in term of selected process parameters.

M. D. Selvan and Dr. G. Karuppusami[6] (2012) performed on Mild Steel and obtained data has been analyzed using Taguchi technique and Genetic algorithm. It has been observed that, Taguchi's orthogonal array provides a large amount of information in a small amount of experimentation. The surface roughness evaluated through Taguchi technique is $0.975 \mu\text{m}$ with 4.308 % error from the

predicted value and for genetic algorithm it is $0.88 \mu\text{m}$ with 4.625 % error from the predicted value.

Amit Joshi and Pradeep[7] (2012) had taken process parameters like spindle speed, depth of cut, feed rate to investigate to reveal their Impact on surface finish.

They found the optimal setting for selected process parameters and optimal value of surface finish was obtained at first level of factor A, third level of factor B and second level of factor C. From the ANOVA analysis they were found that feed rate is the most dominating factor for surface finish.

Bharat Patel [8], 2012. The main objective of the experiment is to optimize the milling parameters (spindle speed, feed rate, depth of cut and cutting tool grade) to achieve low value of the surface roughness. The optimal condition for surface roughness in milling Aluminum was resulted at level 3 for spindle speed and it was 1200 rpm, at level 3 for feed rate and it was 500 rpm, at level 2 for depth of cut and it was 0.5 mm. The corresponding surface roughness is $1.034 \mu\text{m}$.

Avinash A. Thakre[9] (2013) had applied Taguchi methodology for optimize the process parameters for surface roughness in CNC milling machine. The optimal parameters for surface roughness was obtained as spindle speed of 2500 rpm, feed rate of 800 mm/min, 0.8 mm depth of cut, 30 lit/min coolant flow.

Parveen Kumar and Deepak Chaudhary[10] (2013) According to this work mainly three cutting parameters named Spindle speed, Depth of Cut, Feed rate may be selected and optimize the Material Removal rate. The optimum value of MRR is 87.54 mm³/sec. obtained at Spindle speed 3500 r.p.m. & 0.6 mm of feed rate. So as we increase the Spindle speed & Depth of cut the MRR also increase.

3.0 Methodology

3.1 Taguchi method

Taguchi Method is developed by Dr. Genichi Taguchi, a Japanese quality management consultant. The method explores the concept of quadratic quality loss function and uses a statistical measure of performance called Signal-toNoise (S/N) ratio. The S/N ratio takes both the mean and the variability into account. The S/N ratio is the ratio of the mean (Signal) to the standard deviation (Noise). The ratio

depends on the quality characteristics of the product/process to be optimized. The standard S/N ratios generally used are as follows: - Nominal is Best (NB), Lower the Better (LB) and Higher the Better (HB).

In this project the experiments are designed with the help of taguchi L9 orthogonal array. The software used for DOE (Design of experiment) is Minitab17. The project contains many processes which are described one by one in the methodology respectively.

3.2 Input parameters and their levels

Table 1: Selected Input Parameters

| Contro factors (unit) | Level 1 | Level 2 | Level 3 |
|-----------------------|---------|---------|---------|
| Spindle Speed (rpm) | 800 | 1000 | 1200 |
| Feed Rate (mm/min) | 60 | 80 | 100 |
| Depth of Cut (mm) | 0.2 | 0.3 | 0.4 |

3.3 Workpiece

The material used for the experiment is an aluminium alloy (Al 6351) of dimension 110 x 34 x 20 mm³. In this project we are using 9 blocks of aluminium alloy according to taguchi design. The workpiece material compositions are as follows.

Table 2: Material Composition

| Material | Si | Fe | C | Mn | Mg | Zn | Ti | Al |
|----------|------|------|------|------|------|-------|-------|--------|
| Al 6351 | 0.93 | 0.36 | 0.11 | 0.57 | 0.55 | 0.134 | 0.014 | 97.342 |

3.4 Design of experiments (DOE)

For selected input parameters experiments are designed using Taguchi L9 orthogonal standard array. For this purpose software Minitab 17 is used.

Table 3: Design of Experiment

| Experiment No. | Spindle Speed | Feed Rate | Depth of Cut |
|----------------|---------------|-----------|--------------|
| 1 | 800 | 60 | 0.2 |
| 2 | 800 | 80 | 0.3 |
| 3 | 800 | 100 | 0.4 |
| 4 | 1000 | 60 | 0.3 |
| 5 | 1000 | 80 | 0.4 |
| 6 | 1000 | 100 | 0.2 |
| 7 | 1200 | 60 | 0.2 |
| 8 | 1200 | 80 | 0.4 |
| 9 | 1200 | 100 | 0.3 |

3.5 Experimentation

After design of experiment, 9 experiments are carried out in CNC vertical Face milling. After each experiment surface roughness is calculated. A quality characteristic for surface roughness is “smaller is the better”.

3.6 Instruments used for measuring surface roughness

Instrument used in this paper for measurement of surface Roughness is Mitutoyo Surf test SJ-201P. The surf test SJ-201P (Mitutoyo) is a shop-floor type surface-roughness measuring instrument, which traces the surface various machine parts and calculates the surface roughness based on roughness standards, and displays the results. The surface roughness values as measured by the tester are given below-

Fig .1 Experiments on Vertical CNC Machine



Fig.2: Mitutoyo Surftest SJ-201P Instrument**Table 4: Surface Roughness**

| Experiment no. | Spindle Speed | Feed Rate | Depth of cut | Surface Roughness |
|----------------|---------------|-----------|--------------|-------------------|
| 1. | 800 | 60 | 0.2 | 0.300 |
| 2. | 800 | 80 | 0.3 | 0.305 |
| 3. | 800 | 100 | 0.4 | 0.314 |
| 4. | 1000 | 60 | 0.3 | 0.294 |
| 5. | 1000 | 80 | 0.4 | 0.291 |
| 6. | 1000 | 100 | 0.2 | 0.298 |
| 7. | 1200 | 60 | 0.2 | 0.280 |
| 8. | 1200 | 80 | 0.4 | 0.282 |
| 9. | 1200 | 100 | 0.3 | 0.311 |

3.7 Analysis of variance (ANOVA)

The output characteristic, surface finish is analysed by software Minitab 17 and ANOVA is formed, which shows the percentage contribution of each influencing factor on surface roughness. This also signifies that which factor is more dominant in CNC FACE MILLING.

From SN ratios curve this table is formed and the optimal set of parameter from is A3B1C1 (smaller is better).


Tables for Signal to Noise Ratios

This graph shows the objective of using the SN ratio as a performance measurement is to develop product and processes in sensitive to noise factor. From the graph we can see that the effect on surface roughness by increasing the value of each parameter. As per the graph higher value of spindle speed and

lower value of feed rate and depth of cut will provide most optimum surface roughness. According to this graph this optimal set of parameters is A3B1C1.

Table 5: Response Table for Signal to Noise Ratios

| Level | Spindle Speed | Feed Rate | Depth of Cut |
|-------|---------------|-----------|--------------|
| 1. | 20.30 | 13.74 | 15.42 |
| 2. | 15.83 | 15.24 | 17.10 |
| 3. | 13.17 | 20.33 | 16.79 |
| Delta | 7.13 | 6.59 | 1.68 |
| Rank | 1 | 2 | 3 |

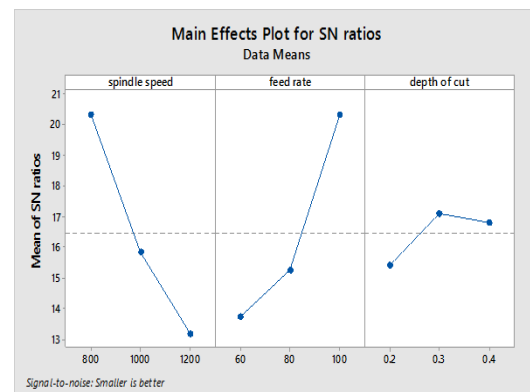Fig. 3 SN Ratio Data and Input Parameter**Response Table for Means:****Table 6: Response table for Means**

| Level | Spindle Speed | Feed Rate | Depth of Cut |
|-------|---------------|-----------|--------------|
| 1. | 0.1097 | 0.2243 | 0.1720 |
| 2. | 0.1623 | 0.1767 | 0.1400 |
| 3. | 0.2380 | 0.1090 | 0.1980 |
| Delta | 0.1283 | 0.1153 | 0.0580 |
| Rank | 1 | 2 | 3 |

The optimal combination of input machining parameter can be observed from fig 4 i.e. graph between S-N ratio and input parameter, the optimal setting of input parameter is (A3B1C1). The process

parameter setting with the highest SN ratio always yields the optimum quality with minimum variation.

This interaction plot shows the dependency of one factor on the levels of other factors. In an interaction plot the parallel lines indicate the no interaction and the greater the difference in slope between the lines, the higher the degree of interaction. The interaction plot given by ANOVA. With the help of Minitab 17 the analysis of variance (ANOVA) is given as follows:

Fig 4: Mean and Control Factors

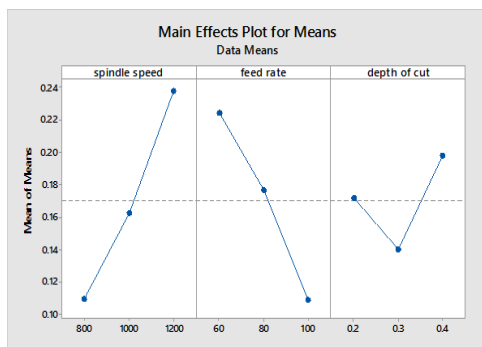


Fig. 5 Interaction Plot of All Factors for Surface Roughness

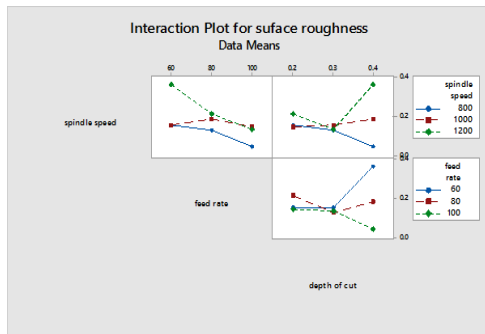


Table 7: ANOVA Result

| Source | DF | Adj. SS | Adj. MS | F-Value | P-Value |
|---------------|----|----------|----------|---------|---------|
| Regression | 3 | 0.045671 | 0.015224 | 5.57 | 0.047 |
| Spindle Speed | 1 | 0.024704 | 0.024704 | 9.03 | 0.030 |
| Feed Rate | 1 | 0.019953 | 0.019953 | 7.30 | 0.043 |
| Depth of cut | 1 | 0.001014 | 0.001014 | 0.37 | 0.569 |
| Error | 5 | 0.013675 | 0.002735 | - | - |
| Total | 8 | 0.059346 | - | - | - |

From above table it can be seen that all the three factors are significantly affect the response (Surface Roughness). Spindle Speed has highest effect on the response, Feed rate has second highest effect on response and depth of cut has least effect on surface roughness.

4.0 Calculation and Results

4.1 Calculation for average performance of every factor: Average performance of each factor on surface roughness is calculated by following expression

Average performance of factor A at level 1= (Sum of all surface roughness's for factor A) / (no. of levels)

Similar expression can be written for calculating the average performance of factor B & C where A represents spindle speed , B represents feed rate and C represents the depth of cut. Now a/c to this formula-

Average performance of spindle speed at all levels respectively

$$(A1) = 0.298$$

$$(A2) = 0.294$$

$$(A3) = 0.291$$

Average performance of feed rate at all levels respectively

$$(B1) = 0.283$$

$$(B2) = 0.292$$

$$(B3) = 0.307$$

Average performance of depth of cut at all levels respectively

$$(C1) = 0.275$$

$$(C2) = 0.303$$

$$(C3) = 0.295$$

4.2 Calculation of optimum surface finish :

Let T = average result for 9 runs of surface finish

$$T = (\text{sum of all surface roughness's from table 4}) / 9$$

$$= 2.534 / 9$$

$$= 0.281$$

$$\text{Optimal surface roughness} = T + (A3 - T) + (B1 - T) + (C1 - T)$$

$$\text{Sopt} = 0.281 + (0.298 - 0.281) + (0.283 - 0.281) + (0.275 - 0.281)$$

$$\text{Sopt} = 0.294$$

5.0 Results

- * After completing the project it can be observed that optimal value of surface finish is obtained at third level of Spindle Speed, first level of Feed Rate and First level of Depth of Cut.
- * Optimal value of surface finish is 0.294 μm .
- * From the ANOVA it can be seen that the p-value of Spindle Speed is minimum that means Spindle Speed is the most dominating factor for modeling surface finish.
- * The value of surface roughness evaluated through Taguchi technique is 0.294 μm with 4.987 % error from the predicted value.

6.0 Conclusions

- The influence of depth of cut, spindle speed and feed rate on machined surface roughness and material removal rate in face milling operation have been studied.

The experiment has been performed on Al 6351 and obtained data has been analyzed using Taguchi technique.

It has been observed that, Taguchi's orthogonal array L9 provides a large amount of information in a small amount of experimentation.

All the three parameters are predominantly contributing to the responses and all have been considered. Optimum machining parameter combination has been found through Taguchi technique

- The main objective of the experiment is to optimize the milling parameters (spindle speed, feed rate and depth of cut) to achieve low value of the surface roughness. The experimental data for the surface roughness values and the calculated signal to noise ratio is shown in table.
- Taguchi's robust design method is suitable to optimize the surface roughness in milling Aluminum.

The optimal condition for surface roughness in milling Aluminum alloy 6351 was resulted at level 3 for spindle speed and it was 1200 rpm, at level 1 for feed rate and it was 60 mm/min, at level 1 for depth of cut and it was 0.2 mm.

The surface roughness evaluated through Taguchi technique is 0.294 μm with 4.987 % error from the predicted value.

References

- [1.] V.S. Suresh, P. Venkateswara Rao & S. G. Deshmukh 2002, "A genetic algorithmic approach for optimization of surface roughness prediction model", *International Journal of Machine Tools and Manufacture*. 42, 4, 2002, 13 – 26.
- [2.] R. Noorani, Y. Farooque & T. Ioi. Improving Surface Roughness of CNC Milling Machined Aluminum Samples due to Process Parameter Variation", *Loyola Marymount University, Los Angeles*. 2, 3, 2008, 10-12.
- [3.] T. K. Barman and P. Sahoo 2009. Fractal Dimension Modeling in CNC Milling Using Taguchi Method", *International Conference on Mechanical Engineering 2009 (ICME2009)* 26- 28th December 2009, Dhaka, Bangladesh. 10,2009, 45-54.
- [4.] S. Moshat, Saurav Datta & P. K. Patel. Optimization of CNC end milling process parameters using PCA-based Taguchi method. *International Journal of Engineering, Science and Technology*, 2, 1, 2010,16-29.
- [5.] Surasit Rawangwong, Jaknarin Chatthong, R. Burapa and W. Boonchouytan 2012, "An investigation of optimum cutting conditions in face milling Al 7075 T6 using design of experiment", *4th International Conference on Applied Operational Research, Proceedings, Lecture Notes in Management Science*, 4, 2012, 88-94.
- [6.] M. D. Selvan & Dr. G. Karuppusami 2012, Optimization of machining parameters for face milling using genetic algorithm", *Engineering Science and Technology: An International Journal (ESTIJ)*, 2, 4, 2012, 29-38.
- [7.] Amit Joshi & Pradeep Kothiyal. Investigating Effect of Machining Parameters of CNC Milling on Surface Finish by Taguchi Method", *International Journal on Theoretical and Applied Research in Mechanical Engineering*. 1, -2, 2012, 47-59.

- [8.] Bharat Patel & Hiren Pal 2012, "Optimization of Machining Parameters For Surface Roughness In Milling Operation", International Journal of Applied Engineering Research.7, 11, 2012, 62-75.
- [9.] Avinash A. Thakre. Optimization of Milling Parameters for Minimizing Surface Roughness Using Taguchi's Approach, International Journal of Emerging Technology and Advanced Engineering, 3, 6, 2013, 34-50.
- [10.] Praveen Kumar & Deepak Chaudhary. To Influence the Process Parameters of CNC Milling Machine Using the Taguchi Method, International Journal of Research in Engineering and Applied Science. 3, 9, 2013, 09-20.